



To
All Our Esteemed Customers


Hope that last quarter business was encouraging. In the coming quarter also we hope that, your business will be good and prosperous. We reiterate our commitment in providing the best support and service to you to achieve your best results in these testing times.

WE HAVE DEVELOPED THE FOLLOWING SIZES FOR OUR DOMESTIC AND INTERNATIONAL CUSTOMERS.

HIWAY LUG RADIAL (HLR)

Traction Characteristics:

Good Traction, Rear Axle, High Performance.

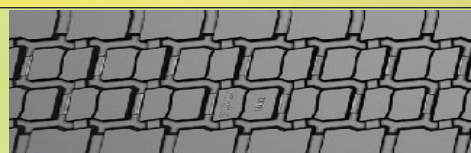


Code	Tread Width (mm)	Tread Thickness (mm)	Non Skid Depth (mm)	Length per Tread (mm)	Under Tread Thickness (mm)	No. of Treads Per Roll	Approx Weight Per Tread (kg.)	Approx Weight per Package (kg.)	Applications Tyre Sizes Used On
HLR – 220 R	220	16.70	13.20	3250 mm (128")	3.50	3	11.20	33.60	RADIAL 10.00 R 20

HIGHWAY RADIAL (HWR)

Traction Characteristics:

Free Rolling. All Wheel Good Traction High Performance.

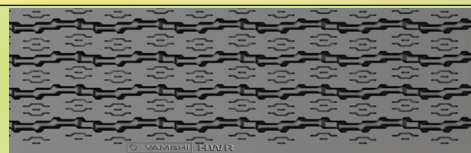

HWR – 210	210	17.20	13.90	3225 mm (127")	3.30	3	11.10	33.30	RADIAL ONLY 10.00 R 20
HWR – 210 XL	210	17.20	13.90	3300 mm (130")	3.30	3	11.35	34.05	RADIAL ONLY 10.00 R 20
HWR – 215	215	17.40	14.10	3225 mm (127")	3.30	3	11.50	34.50	RADIAL ONLY 10.00 R 20
HWR – 215 XL	215	17.40	14.10	3300 mm (130")	3.30	3	11.77	35.31	RADIAL ONLY 10.00 R 20
HWR – 240	240	16.10	12.80	3300 mm (130")	3.30	3	12.35	37.05	RADIAL ONLY 295/80 R 22.5, 11.00 R 22.5
HWR – 240 SL	240	16.10	12.80	3225 mm (127")	3.30	3	12.05	36.15	RADIAL ONLY 295/80 R 22.5, 11.00 R 22.5

JET RIB (JR)

Traction Characteristics:


Good Traction. All Wheel High Performance.



JR – 205 R	205	16.00	12.70	3225 mm (127")	3.30	3	10.40	31.20	BIAS ONLY 10.00 x 20
------------	-----	-------	-------	----------------	------	---	-------	-------	-------------------------

VAMSHI RADIAL RIB (VRR) Traction Characteristics:

Free Rolling. All Wheel High Performance.

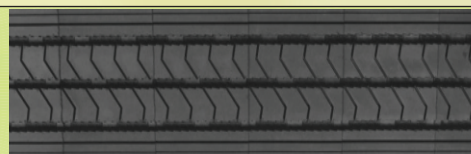

VRR – 220 SL	220	17.90	14.10	3225 mm (127")	3.80	3	12.30	36.90	RADIAL ONLY 10.00 R 20
--------------	-----	-------	-------	----------------	------	---	-------	-------	---------------------------

VAMSHI RADIAL SUPER DRIVE (VRSD)
Traction Characteristics:

Excellent Traction Rear Axle, High Performance.



Code	Tread Width (mm)	Tread Thickness (mm)	Non Skid Depth (mm)	Length per Tread (mm)	Under Tread Thickness (mm)	No. of Treads Per Roll	Approx Weight Per Tread (kg.)	Approx Weight per Package (kg.)	Applications Tyre Sizes Used On
VRSD – 215	215	17.10	13.70	3245 mm (128")	3.40	3	11.20	33.60	RADIAL ONLY 10.00 R 20
VRSD – 215 XL	215	17.10	13.70	3300 mm (130")	3.40	3	11.40	34.20	RADIAL ONLY 10.00 R 20
VRSD – 220 R	220	16.70	13.20	3250 mm (128")	3.50	3	11.30	33.90	RADIAL ONLY 10.00 R 20

VAMSHI RADIAL XPRESS (VRX)


Traction Characteristics: Free Rolling, All Wheel High Performance.



VRX – 205	205	16.20	13.20	3225 mm (127")	3.00	3	9.75	29.25	RADIAL ONLY 10.00 R 20 & 9.00 R 20
VRX – 220	220	17.00	13.80	3225 mm (127")	3.20	3	10.95	32.85	RADIAL ONLY 10.00 R 20
VRX – 220 XL	220	17.00	13.80	3300 mm (130")	3.20	3	11.20	33.60	RADIAL ONLY 10.00 R 20

VAMSHI SUPER RADIAL (VSR)

Traction Characteristics: Free Rolling, All Wheel High Performance.

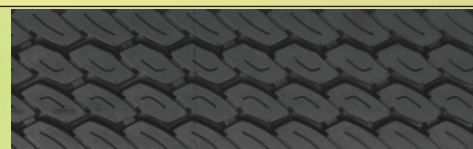

VSR – 215	215	17.20	13.90	3225 mm (127")	3.30	3	11.40	34.20	RADIAL ONLY 10.00 R 20
VSR – 215 XL	215	17.20	13.90	3300 mm (130")	3.30	3	11.66	34.98	RADIAL ONLY 10.00 R 20
VSR – 220 SL	220	18.10	14.60	3240 mm (128")	3.50	3	12.40	37.20	RADIAL ONLY 10.00 R 20
VSR – 220 R	220	16.50	13.30	3235 mm (127")	3.20	3	11.20	33.60	RADIAL ONLY 10.00 R 20
VSR – 220 R XL	220	16.50	13.30	3300 mm (130")	3.20	3	11.42	34.26	RADIAL ONLY 10.00 R 20

MR. K. GOPAKUMAR, ASSISTANT MANAGER, INCHARGE OF MARKETING OPERATIONS IN TELANGANA STATE HAS RESIGNED AND LEFT OUR COMPANY. ALL CUSTOMERS ARE REQUESTED TO CONTACT MR. DINESH KUMAR (MOBILE NO. 9666614932) FOR ALL VAMSHI SERVICES.

Hope you liked this NEWSLETTER.
We solicit your feedback for improvisation.

Your sincerely,
R. SURENDRA REDDY
Managing Director

**AN ISO 9001-2008
CERTIFIED COMPANY**